


# Decking Strips

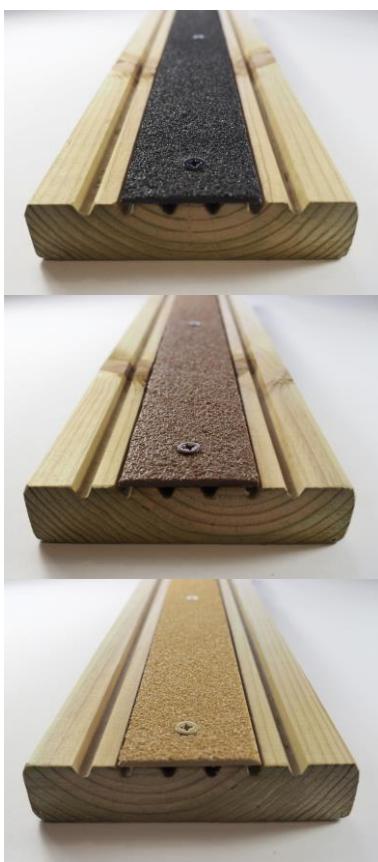

## OPTIONS

**Standard Stock Colours:**  
Black, Brown or Beige (Buff)

**Factory Bespoke Colours:**  
Any RAL / BS colour\*

**Dimensions:**  
Manufactured on a nominally 4mm thick  
GRP profile

**Convex shaped profile:**  
Length: 3200 mm  
Width: 50 mm

**Additional Options:**  
Choice of colour\*  
Cut to exact sizes prior to delivery  
Pre-drilled holes  
Colour matched stainless steel  
woodscrews available from stock

\*Minimum order quantities may apply. Please contact us for further information

## SPECIFICATION

**Profile & resin coatings:**  
High quality isophthalic polyesters

**Grit:**  
Refined aluminium oxide

**Hardness:**  
9.5 moh / 2200 knoop diamond

**Suitable traffic:**  
Foot

**Can be fixed to:**  
Wood

**Fixing methods:**  
Countersunk woodscrews

## BENEFITS

- > highly effective anti-slip safety surface
- > long lasting & durable
- > suitable for all environments, exterior or interior
- > refined, extra-hard aluminium oxide granules give superior performance & wear characteristics, pedestrian (grade 24, fine)
- > light weight profiles add insignificant load to existing structures
- > rapid & easy installation – screws available from stock
- > resistant to a wide range of chemicals (full details available)
- > for special applications, a range of RAL & BS colours available to order from the factory\*
- > easily cleanable
- > rapid delivery: typically within 3-5 days of order\*
- > free cutting service\*

\*subject to order type & size

## APPLICATIONS

Typical applications:

- Domestic wooden decks & ramps
- Mobile home porches & verandas
- Dock & quayside areas
- Pedestrian bridges & walkways

## DESCRIPTION

A nominally 4mm thick, tough GRP profiled cover, coated in a combination of premium quality aluminium oxide & resin components gives the Decking Strip product a highly effective and durable Anti-slip surface that will withstand the rigours of all external environments. Designed specifically to reduce the risk of slipping on wooden deck surfaces, they are a hard wearing and highly effective solution especially in wet conditions. The products are fixed using stainless colour-matched woodscrews.

The Decking Strip profiles may be cut and finished to specified sizes prior to delivery for ease of installation or can be cut on site using a diamond tipped tool. Drill holes are formed using a standard masonry bit in rotary only mode.